

PV INSULATION EARTH TESTER KEW 6024PV

No need to short circuit strings for measuring insulation resistance!




KYORITSU ELECTRICAL INSTRUMENTS WORKS, LTD. www.kew-ltd.co.jp

KEW 6024PV Specification

sulation resistance	PV Insulation*			Insulation			
Test voltage	500V 1000V			250V	500V	1000V	
Range(Auto-ranging)	20.00/200.0/2000ΜΩ				20.00/200.0/2000ΜΩ		
Measuring range	0.00 to 1.50MΩ 1.51 to	200.0MΩ	0.00 to 1.50MΩ	1.51 to 1000MΩ			
	200.1 to 2000MΩ		1001 to 2000MΩ			-	
Accuracy	±5%rdg±6dgt ±1.5%	ordg±5dgt	±5%rdg±6dgt	±1.5%rdg±5dgt			
Rated current	_			1.0 to 1.2mA			
			_		0.25MΩ	0.5ΜΩ	1MΩ
First effective measuring range					1.51 to 100.0MΩ	1.51 to 200.0MΩ	1.51 to 1000MΩ
Mid-scale value	-			50ΜΩ			
Accuracy					±1.5%rdg±5dgt		
Second effective measuring range					1.20 to 1.50MΩ	1.20 to 1.50MΩ	1.20 to 1.50MΩ
		-	-		100.1 to 2000MΩ	200.1 to 2000MΩ	1001 to 2000MΩ
Accuracy					±5.0%rdg±6dgt		
Open circuit voltage	1 to 1.2times						
Short circuit current	1.5mA or less						
arth resistance		· · · · · · · · · · · · · · · · · · ·					
Measuring range(Auto-ranging)	20.00/200.0/2000Ω						
Accuracy	±3.0%rdg±0.1Ω (20Ωrange) ±3.0%rdg±3dgt (200/2000Ωrange)						
oltage measurement							
Measuring range	AC 5 to 600V (45 to 65Hz) DC ±5 to ±1000V						
Accuracy	±1.0%rdg±4dgt						
eneral							
Applicable standards	IEC 61010-1 CAT IV 300V / CAT II 600V Pollution2, IEC 61010-2-030,						
	IEC 61010-2-034, IEC 61010-031, IEC 60529(IP54), IEC 61557-1, 2, 5, 10, IEC 61326-1,2-2(EMC)						
Power source	LR6(AA) (1.5V) × 6						
Dimension / Weight	84(L) x 184(W) x 133(D)mm / Approx. 900g (including batteries)						
Accessories	7196B(Test leads with remote control switch), 7244A(Test lead with alligator clip), 8017(Extension prod long), 8072(CAT II standard prod),						
	8212-USB(USB adapter with "KEW Report (Software)"), 9155(Shoulder strap), 9156A(Soft case), LR6 x 6, Instruction manual						
Optional accessories	7243A(L-shaped probe), 7245A(Pr	ecision measure	ment cord set), 80	016(Hook type prod)		

*6024PV supports PV systems up to 1000V.

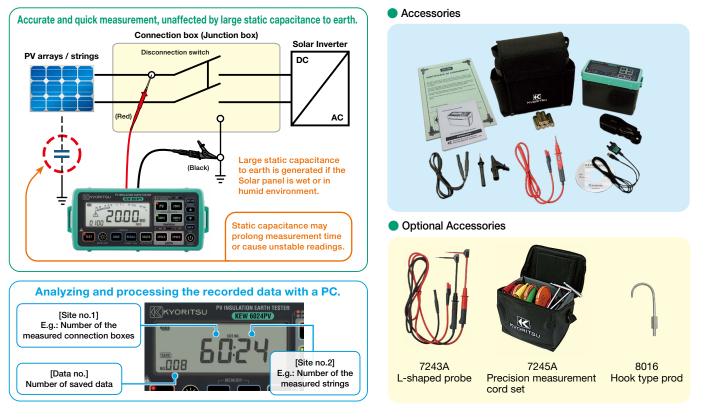



Please read the "Safety Warnings" in the instruction manual supplied with the instrument thoroughly and completely Safety Warnings : for correct use. Failure to follow the safety rules can cause fire, trouble, electrical shock, etc. Therefore, make sure to operate the instrument on a correct power supply and voltage rating marked on each instrument.

For inquiries or orders :

KYORITSU ELECTRICAL INSTRUMENTS WORKS, LTD.

2-5-20, Nakane, Meguro-ku, Tokyo, 152-0031 Japan Phone:+81-3-3723-0131 Fax:+81-3-3723-0152

www.kew-ltd.co.jp

