

2.5 kV

maximal
measuring
voltage for R_{ISO}

Z_S R_E
 R_{ISO} E R_{CONT}

complex
measurements of
installations



600 V

300 V

Focused on insulation resistance measurements

Features

The meter offers a **wide range** of functionalities. It combines the measuring capabilities of several devices, while ensuring equally good accuracy. The device can be used for all measurements for commissioning of electrical installations in accordance with applicable regulations:

- » short circuit loop impedance (also in circuits secured with RCDs),
- » RCD parameters,
- » insulation resistance,
- » earth resistance (3-pole method),
- » continuity of protective and equipotential bondings,
- » phase sequence test.

Additional functions

- Checking the correctness of PE connection using a contact electrode.
- Measurement of voltage (0 ... 500 V) and network frequency.
- Memory of 990 results.
- Wireless data transmission to a computer.





Testing the insulation with a voltage of 2.5 kV

The unique feature of the meter is the option of measuring the insulation resistance with a **voltage of 2500 V**. Moreover, with **AutoISO-2500** adapter, the user may check R_{ISO} of 3-, 4- or 5-wire conductors and cables.

The device has a built-in timer. It may be used to set three different periods for measurements and result read-outs (in the range of 1...600 s). It also automatically calculates two absorption coefficients.

In order to ensure safety of the user, after the measurement completion or interruption, the device automatically unloads the tested object.

Inspection of electrical safety

This device may be used to **inspect safety of electrical systems in households and industrial facilities**. Measurements can be easily automated with:

- auto mode of residual current devices (RCD) tests,
- AutoISO-2500 adapter for automatic insulation resistance test of 3-, 4- and 5-conductor cables, without switching.




Increased resistance to environmental conditions

The meter will cope well in difficult environmental conditions. Protection against penetration of dust and water is ensured by a unique housing with a level of protection IP54. It is resistant to mechanical damage, and a special design allows you to easily protect the screen by shielding using the cover of the meter. In addition to the fact that it protects against damage, it also allows you to conveniently carry and use the device in different positions.

Communication and software

You can easily transfer measurement data to your computer via USB port or wireless communication. In order to generate a report on measurements for electric shock protection, use **Sonel Reports PLUS** software. Saving the downloaded data to the simplest formats and printing is provided by free **Sonel Reader** software.

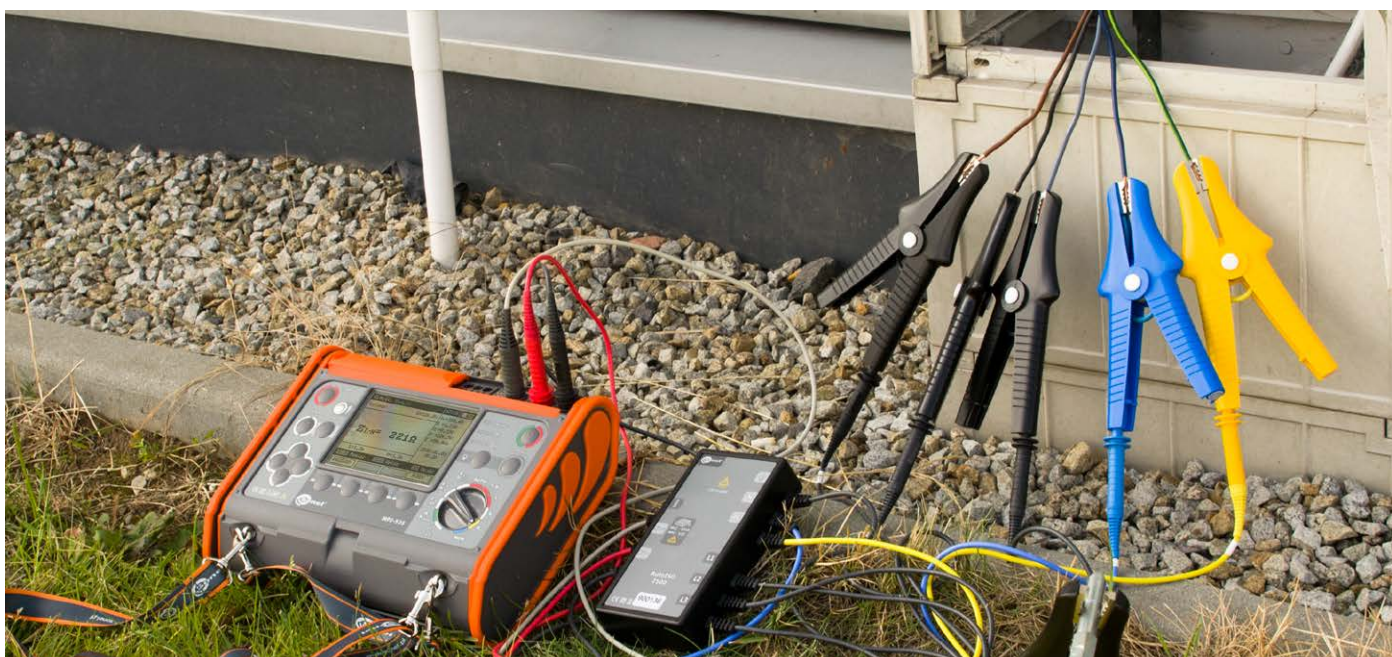

Specifications

Measurement functions	Measurement range	Display range	Resolution	Accuracy \pm (% m.v. + digits)
Fault loop impedance				
Fault loop Z_{L-PE} , Z_{L-N} , Z_{L-L}	0,13 Ω ...1999,9 Ω acc. to IEC 61557	0,00 Ω ...1999 Ω	from 0,01 Ω	\pm (5% m.v. + 3 digits)
Fault loop Z_{L-PE} in RCD mode	from 0,50 Ω ...1999 Ω acc. to IEC 61557	0,00 Ω ...1999 Ω	from 0,01 Ω	from \pm (6% m.v. + 5 digits)
Measurements of RCD parameters				
RCD tripping test and measurement of tripping time t_A measuring current $0.5 I_{\Delta n}$, $1 I_{\Delta n}$, $2 I_{\Delta n}$, $5 I_{\Delta n}$				
general and short-time delay RCD	0 ms...300 ms	0 ms...300 ms	1 ms	\pm (2% m.v. + 2 digits)
selective RCD	0 ms...500 ms	0 ms...500 ms	1 ms	\pm (2% m.v. + 2 digits)
Measurement of RCD tripping current I_A measuring current $0.2 I_{\Delta n}$... $2.0 I_{\Delta n}$				
for sinusoidal residual current (AC type)	3,0 mA...1000 mA	3,0 mA...1000 mA	from 0,1 mA	\pm 5% $I_{\Delta n}$
for unidirectional residual current and unidirectional with the 6 mA DC bias (type A)	3,5 mA...700 mA	3,5 mA...700 mA	from 0,1 mA	\pm 10% $I_{\Delta n}$
for direct residual current (type B)	2,0 mA...1000 mA	2,0 mA...1000 mA	from 0,1 mA	\pm 10% $I_{\Delta n}$
Earth resistance				
3-pole method	from 0,5 Ω ...1,99 k Ω acc. to IEC 61557-5	0,00 Ω ...1,99 k Ω	from 0,01 Ω	from \pm (2% m.v. + 3 digits)
Insulation resistance				
Measuring voltage 50 V	50 k Ω ...250 M Ω acc. to IEC 61557-2	0 k Ω ...250 M Ω	from 1 k Ω	\pm (3% m.v. + 8 digits)
Measuring voltage 100 V	100 k Ω ...500 M Ω acc. to IEC 61557-2	0 k Ω ...500 M Ω	from 1 k Ω	\pm (3% m.v. + 8 digits)
Measuring voltage 250 V	250 k Ω ...999 M Ω acc. to IEC 61557-2	0 k Ω ...999 M Ω	from 1 k Ω	\pm (3% m.v. + 8 digits)
Measuring voltage 500 V	500 k Ω ...2,00 G Ω acc. to IEC 61557-2	0 k Ω ...2,00 G Ω	from 1 k Ω	from \pm (3% m.v. + 8 digits)
Measuring voltage 1000 V	1000 k Ω ...3,00 G Ω acc. to IEC 61557-2	0 k Ω ...3,00 G Ω	from 1 k Ω	from \pm (3% m.v. + 8 digits)
Measuring voltage 2500 V	2,50 M Ω ...9,99 G Ω acc. to IEC 61557-2	0 k Ω ...9,99 G Ω	from 1 k Ω	from \pm (3% m.v. + 8 digits)
Resistance of protective conductors and equipotential bondings				
Measurement of resistance of protective conductors and equipotential bondings with \pm 200 mA current	0,12 Ω ...400 Ω acc. to IEC 61557-4	0,00 Ω ...400 Ω	from 0,01 Ω	\pm (2% m.v. + 3 digits)
Measurement of resistance with low current	0,0 Ω ...1999 Ω	0,0 Ω ...1999 Ω	from 0,1 Ω	\pm (3% m.v. + 3 digits)
Phase sequence indication	in the same direction (correct). opposite direction (incorrect). U_{L-L} voltage: 95 V...500 V (45 Hz...65 Hz)			

"m.v." - measured value

Other technical data

Safety and work conditions

Measuring category according to EN 61010	IV 300 V, III 600 V
Ingress protection	IP54
Type of insulation according to EN 61010-1 and IEC 61557	double
Dimensions	288 x 223 x 75 mm 11.3" x 8.8" x 3.0"
Weight	ca. 2.2 kg 4.8 lbs
Operating temperature	0...+50°C 32...122°F
Storage temperature	-20...+70°C -4...158°F
Humidity	20...90%
Nominal temperature	23 ± 2°C
Reference humidity	40%...60%

Memory and communication

Memory of measurement results	990 cells, 57 500 records
Data transmission	USB 2.0, radio

Other information

Quality standard – development, design and production	ISO 9001
The product meets the EMC (emission for industrial environment) requirements according to standards	EN 61326-1 EN 61326-2-2

Standard accessories



Test lead 1.2 m (banana plugs) red / blue / yellow

WAPRZ1X2REBB
WAPRZ1X2BUBB
WAPRZ1X2YEBC




Test lead 5 kV 1.8 m (banana plugs) black shielded / red

WAPRZ1X8BLBB
WAPRZ1X8REBB



Crocodile clip 1 kV 20 A black / yellow

WAKROBL20K02
WAKROYE20K02



Pin probe 1 kV (banana socket) red / blue / yellow

WASONREOGB1
WASONBUOGB1
WASONYEOGB1



Pin probe 5 kV (banana socket) red

WASONREOGB2



Crocodile clip 11 kV 32 A black

WAKROBL32K09



Test lead (on a reel) 15 m / 30 m

WAPRZ015BUBBSZ
WAPRZ030REBBSZ



2x earth contact test probe (rod), 30 cm

WASONG30



USB cable

WAPRZUSB



Charging

Mains cable with IEC C7 plug
WAPRZLAD230US

Z7 power supply
WAZASZ7



Ni-MH battery 4.8 V 4.2 Ah
WAAKU07



L2 hanging straps (set)

WAPZSZEKPL



L2 carrying case

WAFUTL2



Factory calibration certificate

Optional accessories



EVSE-01 adapter for testing vehicle charging stations

WAADAEVSE01



AutoISO-1000C adapter

WAADAAISO10C



WS-03 adapter with START button with UNI-Schuko plug

WAADAWS03US

WS-04 adapter with UNI-SCHUKO angular plug

WAADAWS04US



TWR-1J RCD breaker testing adapter

WAADATWR1J



Crocodile clip 1 kV 20 A red /blue

WAKRORE20K02
WAKROBU20K02



Crocodile clip 11 kV 32 A red

WAKRORE32K09



PRS-1 resistance test probe

WASONPRS1



Foldable pin probe, 1 kV, 2 m (banana socket)

WASONSP2M



Pin probe 5 kV (banana socket) black

WASONBLOGB2



Test lead for fault loop measurement (banana plugs) 5 m / 10 m / 20 m

WAPRZ005REBB
WAPRZ010REBB
WAPRZ020REBB



Test lead for earth resistance measurement 25 m red / blue

WAPRZ025REBBSZ
WAPRZ025BUBBSZ



Test lead for earth resistance measurement 50 m

WAPRZ050YEBBSZ



Cramp with banana socket

WAZACIMA1



Earth contact test probe 80 cm

WASONG80V2



L-3 carrying case (for 80 cm test probes)

WAFUTL3



Industrial socket adapter 16 A / 32 A

WAADAAGT16T
WAADAAGT32T



Three-phase socket adapter 16 A / 32 A

WAADAAGT16C
WAADAAGT32C



Three-phase socket adapter 16 A / 32 A

WAADAAGT16P
WAADAAGT32P



Three-phase socket adapter 63 A

WAADAAGT63P



CS-1 cable simulator

WAADACS1



CS-5kV calibration box

WAADACS5KV



Cable for battery charging from car cigarette lighter socket (12 V)

WAPRZLAD12SAM



Battery pack 4xLR14

WAPOJ1



OR-1 USB wireless receiver

WAADAUSBOR1



Test wire reel

WAP0ZSZP1



Calibration certificate with accreditation